

55" FREESTANDING MULTI TOUCH POSTER



24/7 Usage



Easy USB to PC Setup



LED Backlight Technology



Integrated Speakers



Infrared Multi Touch Screen



High Definition Display



Multiple AV Inputs



Wide Viewing Angle



Cross-platform Compatibility



Eco-Friendly Power Timer



Commercial Touch Screen



Temperature Control

VERSATILE 6-POINT TOUCH

Using industrial Infrared 6-point touch technology these displays ideal for public locations as anything (such as a gloved hand or stylus) can be used as a pointer. They also have cross-platform compatibility, supporting all major operating systems such as Windows. These units are ideal for group browsing applications.



INTERNAL SPACE FOR PC OR MEDIA PLAYER

As the display needs an external media source there is room, inside the unit's lockable door, for a small form factor PC, an Apple Mac Mini or an Android media player.

SMART TEMPERATURE CONTROL SYSTEM

The internal air-conditioning system allows the screens to be in constant use. Internal fans keep the panel and other internal components at the optimum working temperature; ensuring a long and reliable life for your screens.



LED BACKLIGHT TECHNOLOGY

Thanks to their LED backlight these displays offer improved brightness and contrast as well as drastically improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly.

55" FREESTANDING MULTI TOUCH POSTER



COMMERCIAL GRADE PANEL AND COMPONENTS

Fitted with a commercial grade panel, with a lifespan of 50,000 hours, and using high quality components ensures that this display can be in constant use 24/7.

ENVIRONMENTALLY FRIENDLY POWER TIMER

This allows for reduced power usage by automatically powering off in hours that the display is not required. You can set daily On/Off times for your display.



BUILT-IN SPEAKERS


The display has two integrated slimline speakers for applications that involve an audio element.

IMAGES:



55" FREESTANDING MULTI TOUCH POSTER

DRAWING:

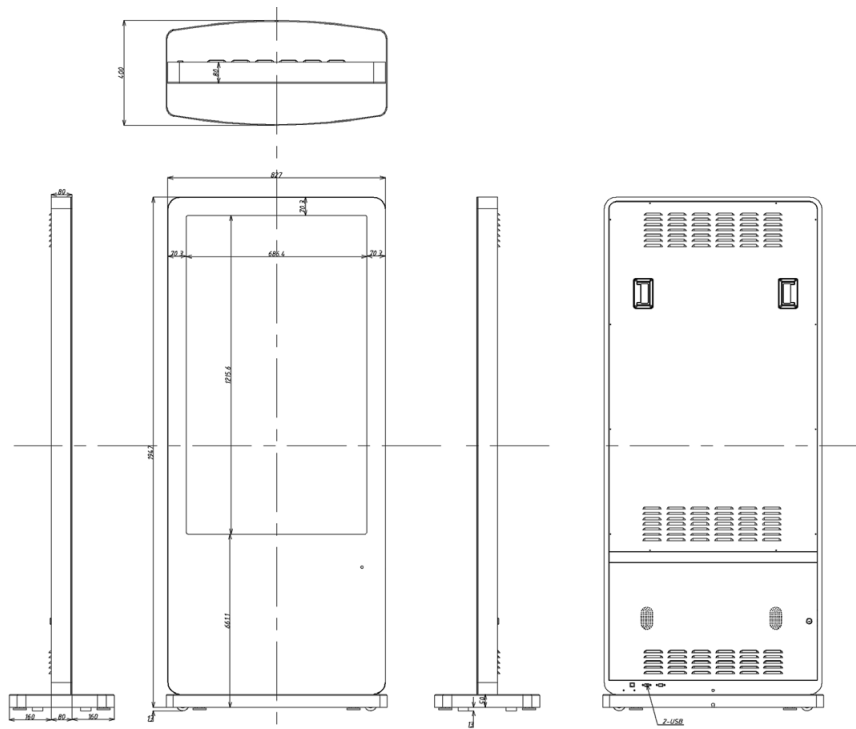

FULL SPECIFICATION:

55" Freestanding Multi Touch Poster	
Screen Size	55 inch
Product Size (WxHxD mm)	827x1947x80
Display Area (WxH mm)	686.4x1215.6
Pixel Pitch	0.4845x0.4845
Resolution	1080x1920
Brightness (cd/m ²)	500
Aspect Ratio	9:16
Contrast Ratio	5000:1
Viewing Angle	178°
Colours	16.7M
Colour Temperature	10000K
Lifetime (hours)	50,000
Touch Resolution (Interpolation)	4096x4096
Minimum Touch Object	5.2mm
Response Time	≤16ms
Touch Times	Unlimited
Operation System	6-Point - Android, Linux, Windows XP/2003/Vista/7/8, 1-Point - Mac
Interface	USB
Speakers	2W x2 ,4Ω
AV Inputs	VGA, HDMI, Audio Socket (3.5mm)
Power Supply	AC110-240V (50Hz-60Hz)
Power Consumption (W)	450
Package Size (WxHxD mm)	990x2240x570
Net Weight (kg)	115
Gross Weight (kg)	136
Footprint (WxD mm)	827x400
Accessories	Remote control, AC power cable, USB cable, HDMI cable

Errors and omissions excepted